

BMP-5

Mechanical

Recommended Travel: .050 (1.27)
 Full Travel: .079 (2.00)
 Direction of Rotation: Counter clock wise
 Scribed Diameter: .050 (1.27)

Spring Force in oz. (grams)

	Preload	Rec. Travel
Standard	2.43 (68.9)	5.0 (141.7)

Electrical (Static Conditions)

Current Rating: 20 mA
 Voltage Rating: 12VDC
 Recommended Duty Cycle: 2 sec. On (min.)
 3 sec. Off

Materials and Finishes




Plunger Tip: Carbide
 Receptacle: Stainless Steel

Mounting

Hole diameter: \emptyset .472 (12.1)
 or M12 x 1.0 threaded hole

Order Number

Board Marker: BMP-5
 Replacement Tip kit: BMT-4

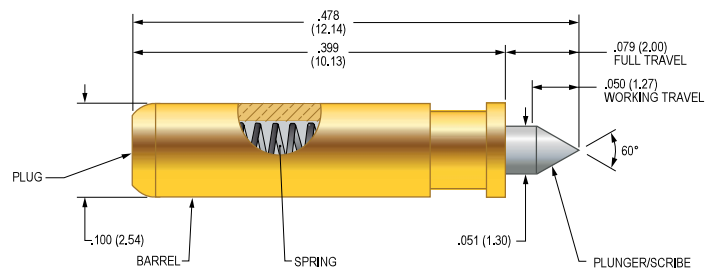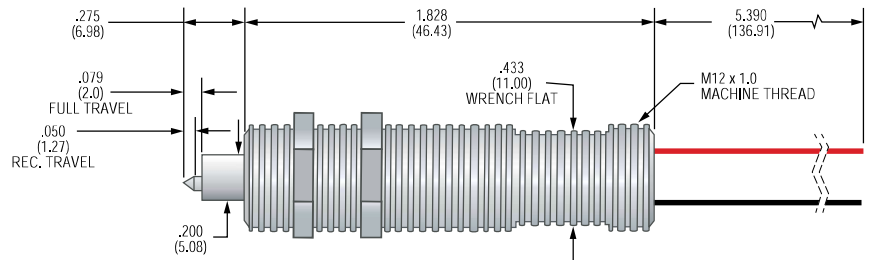

BMT-4

Mounting Options

