


BTP-25

Bead Probe

Product Family: BTP

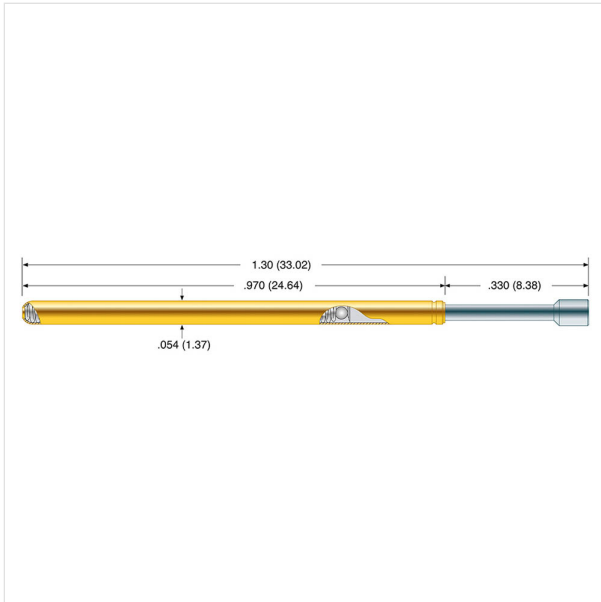

Springs

Force Type - Preload in oz (g) - Rec. Travel in oz (g) -

Spring Material

Light - 0.75 (21.00) - 2.00 (57.00) -

Standard - 1.50 (43.00) - 4.00 (114.00) -

Alternate - 2.65 (75.00) - 6.50 (184.00) -

High - 2.84 (81.00) - 8.00 (227.00) -


Ultra High - 1.77 (50.00) - 10.00 (283.00) -

TIPS:


Tip Materials: Alloy

Tips:


BTP-25C




BTP-25F



BTP-25HF




BTP-25HL




Related Products:


SPR-25W




SPR-25W-1




SPR-25W-2




SPR-25W-2L




SPR-25W-2LL




SPR-25W-3



EPR-25W-2



EPR-25W-2LL



EPR-25W-2L

