


CP-2

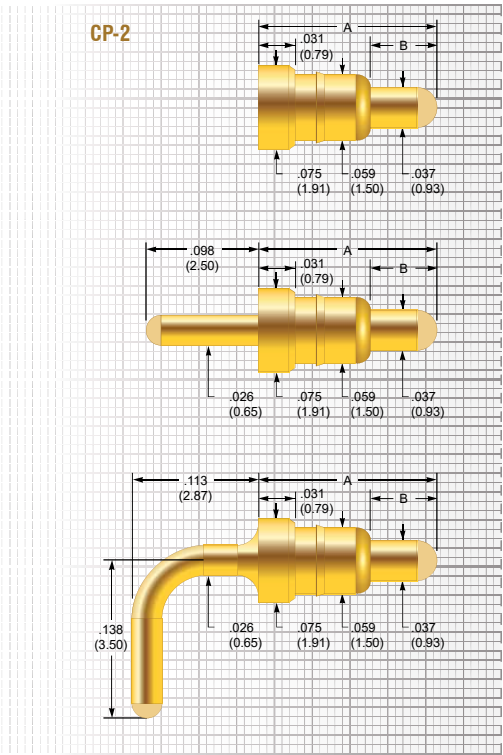

CP-2SB-X

CP-2TB-X

CP-2LB-X

Mechanical

	Size 4	Size 6	Size 8	Size 12
Recommended Travel:	0.030 (0.75)	0.059 (1.50)	0.079 (2.00)	0.118 (3.00)
Full Travel:	0.039 (1.00)	0.069 (1.75)	0.089 (2.25)	0.128 (3.25)
Operating Temperature:	-55°C to +155°C			

Spring Force in oz. (grams)

	Size 4	Size 6	Size 8	Size 12
Preload	0.66 (18.7)	1.32 (37.4)	1.17 (33.3)	0.95 (26.9)
Rec. Travel	4.5 (127.6)	4.5 (127.6)	4.5 (127.6)	4.5 (127.6)

Mechanical

Dimension A	0.158 (4.00)	0.236 (6.00)	0.315 (8.00)	0.472 (12.00)
Dimension B	0.059 (1.50)	0.087 (2.20)	0.114 (2.90)	0.169 (4.30)

Electrical (Static Conditions)

Current Rating	5 A
Average Probe Resistance	50 mOhms

Materials and Finishes

Plunger:	BeCu, Gold plated
Barrel:	Brass, Gold plated
Spring:	Stainless Steel

Dimensions in inches (millimeters). Specifications subject to change without notice. Consult factory for other temperature requirements, and applications below -40°C. Stocking Disclaimer: Stocking levels for part numbers listed in this catalog are subject to change. Availability is based on current levels of usage and demand.

