


LFRE-1

High Performance Lead Free Probe

Product Family: LFRE

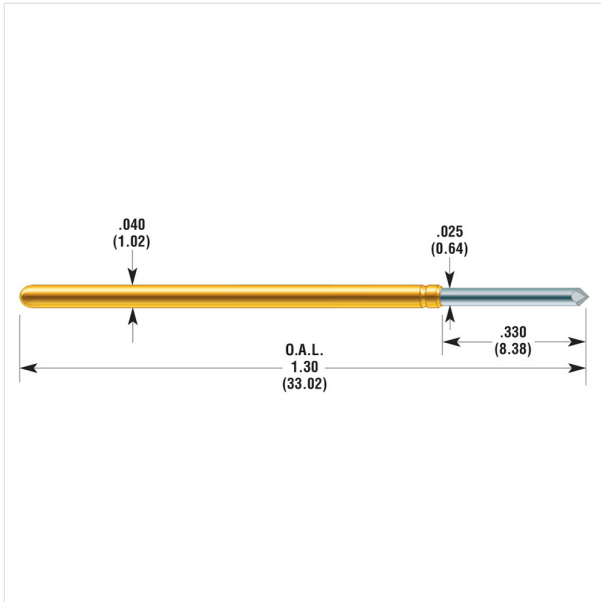

Springs

Force Type - Preload in oz (g) - Rec. Travel in oz (g) -

Spring Material

Light - 0.83 (24.00) - 2.00 (57.00) -

Standard - 0.62 (18.00) - 4.00 (114.00) -

Alternate - 2.39 (68.00) - 6.00 (170.00) -

Elevated - 1.68 (48.00) - 7.00 (198.00) -

High - 1.73 (49.00) - 8.00 (227.00) -


Ultra High - 2.84 (81.00) - 10.00 (283.00) -

TIPS:


Tip Materials: Alloy

Tips:


LFRE-1A




LFRE-1B




LFRE-1I40




LFRE-1J




LFRE-1L24




LFRE-1UN




LFRE-1V




LFRE-1H




LFRE-1I




LFRE-1I15




LFRE-1I35




LFRE-1I8




LFRE-1L




LFRE-1L18




LFRE-1T




LFRE-1T24




LFRE-1T30




LFRE-1Z



LFRE-1Z1




LFRE-1T1




Related Products:


ELTR-1W-2




LTR-1W




LTR-1W-1




LTR-1W-2




LTR-1W-2L



LTR-1W-2LL



ELTR-1W-2L



ELTR-1W-2LL

