
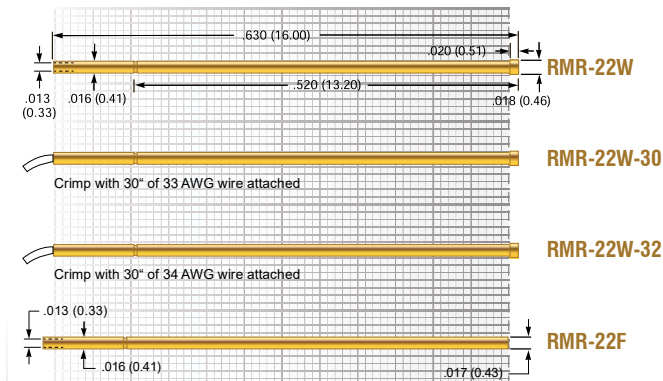


RMP-22B

20 mil (0.51 mm)

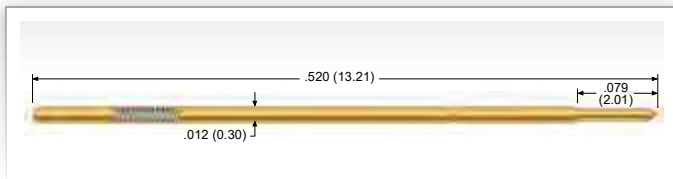

Mechanical

Recommended Travel: .052 (1.33)
 Full Travel: .079 (2.01)
 Operating Temperature: -55°C to +105°C

Spring Force in oz. (grams)

	Preload	Rec. Travel
Standard	0.51 (14)	1.69 (48)

Electrical (Static Conditions)

Current Rating: 2 amps
 Average Probe Resistance: <125 mOhms

Materials and Finishes

Plunger: Heat-treated Steel, Nickel Boron plated
 Barrel: BeCu alloy, Gold plated
 Spring: Music Wire, Gold plated

Receptacle



Hole diameter: Ø .016 to .017 (0.41 to 0.43)
 Suggested drill: #78 or 0.42 mm
 Material Housing: Heat-treated BeCu, Gold plated over hard Nickel

Tip Style

B	G	J	U
Ø .008 (0.20)			

MEP-30

30 mil (0.76 mm)

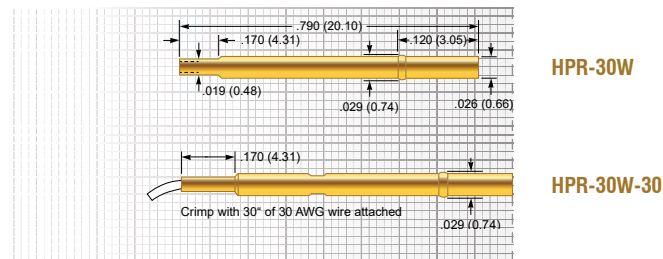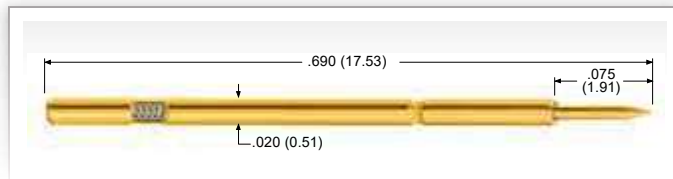

Mechanical

Recommended Travel: .050 (1.27)
 Full Travel: .075 (1.91)
 Operating Temperature: -55°C to +105°C

Spring Force in oz. (grams)

	Preload	Rec. Travel
Standard	0.39 (11)	1.39 (39)

Electrical (Static Conditions)

Current Rating: 2 amps
 Average Probe Resistance: <50 mOhms

Materials and Finishes

Plunger: Heat-treated BeCu, Gold plated over hard Nickel
 Barrel: Work hardened BeCu, Gold plated over hard Nickel
 Spring: Music Wire, Gold plated

Receptacle

Hole diameter: Ø .0265 to .0276 (0.67 to 0.70)
 Suggested drill: #71 or 0.70 mm
 Material: Work hardened BeCu, Gold plated over hard Nickel

Tip Style

B	G	J	U
Ø .014 (0.36)	Ø .014 (0.36)	Ø .014 (0.36)	Ø .012 (0.30)