



## MEP-22B

20 mil (0.51 mm)

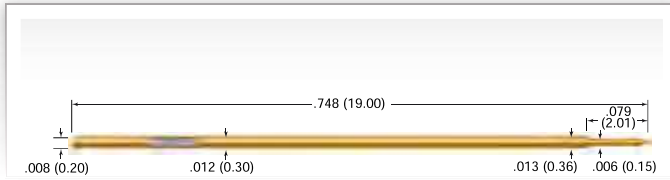

## MEPJ-22BD

20 mil (0.51 mm)

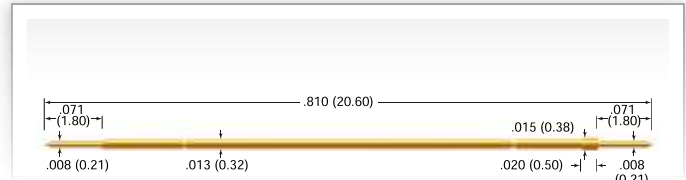

### Mechanical

Recommended Travel: .050 (1.27)  
 Full Travel: .079 (2.01)  
 Operating Temperature: -55°C to +105°C

### Spring Force in oz. (grams)

	Preload	Rec. Travel
<b>Standard</b>	0.51 (14)	1.69 (48)

### Electrical (Static Conditions)

Current Rating: 2 amps  
 Average Probe Resistance: <125 mOhms


### Materials and Finishes

Plunger: Heat-treated Steel, Nickel Boron plated  
 Barrel: BeCu alloy, Gold plated  
 Spring: Music Wire, Gold plated

### Mounting

Hole diameter: Ø .0135 to .0140 (0.34 to 0.36)  
 Suggested drill: #80 or 0.35 mm

### Tip Style

B				
Ø .006 (0.15)				
				

### Mechanical

Recommended Travel: .052 (1.33)  
 Full Travel: .079 (2.01)  
 Operating Temperature: -55°C to +105°C

### Spring Force in oz. (grams)

	Preload	Rec. Travel
<b>Standard</b>	0.38 (11)	1.69 (48)

### Electrical (Static Conditions)

Current Rating: 2 amps  
 Average Probe Resistance: <125 mOhms


### Materials and Finishes

Plunger: Heat-treated Steel, Nickel Boron plated  
 Barrel: Phosphor Bronze, Gold plated  
 Spring: Music Wire, Gold plated

### Mounting

Hole diameter: Ø .0135 to .0140 (0.34 to 0.36)  
 Suggested drill: #80 or 0.35 mm

### Tip Style

B				
Ø .008 (0.20)				
				

HIB & DUT

