


## P3325

125 mil (3.18 mm)

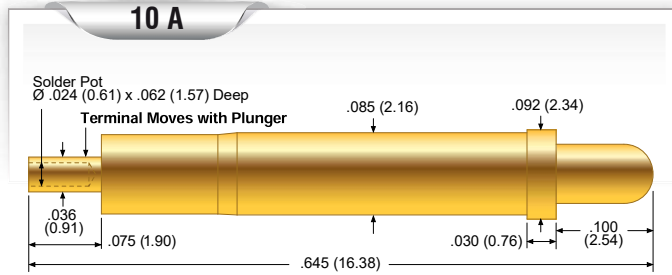

### Mechanical

Recommended Travel: .066 (1.68)  
 Full Travel: .100 (2.54)  
 Operating Temperature: -55°C to +105°C

### Spring Force in oz. (grams)

	Preload	Rec. Travel
Standard	5.0 (142)	8.3 (235)

### Electrical (Static Conditions)

Current Rating: 10 amps  
 Average Probe Resistance: <10 mOhms



### Materials and Finishes

Plunger: Hardened BeCu, Gold plated  
 Barrel: Brass  
 Spring: Music Wire

### Mounting Options


Hole diameter: Ø .086 (2.18)  
 Suggested drill: #44 or 2.18 mm

### Tip Style

0	1		
Ø .061 (1.55)	Ø .090 (2.29)		
			

## P2447-1W

225 mil (5.72 mm)

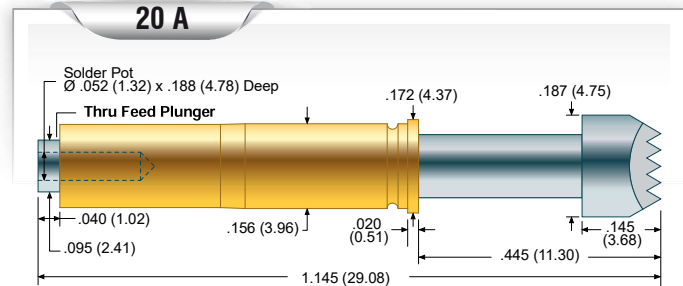

### Mechanical

Recommended Travel: .200 (5.08)  
 Full Travel: .300 (7.62)  
 Operating Temperature: -55°C to +150°C

### Spring Force in oz. (grams)

	Preload	Rec. Travel
Standard	6.0 (170)	14.0 (397)

### Electrical (Static Conditions)

Current Rating: 20 amps  
 Average Probe Resistance: <10 mOhms

### Materials and Finishes

Plunger: Hardened BeCu, Nickel plated  
 Barrel: Brass  
 Spring: Stainless Steel

### Mounting Options

Hole diameter: Ø .157 (3.99)  
 Suggested drill: #22 or 3.99 mm

