


Double Ended Probe

Semiconductor Probe





Avaiable Tip Styles

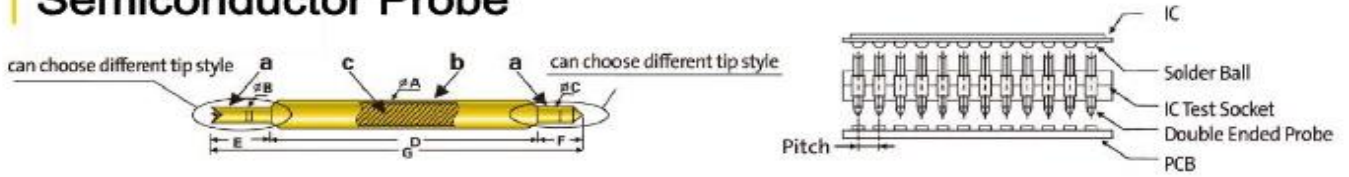

Pitch	Part Number	Dimension(mm)							Spring Force	working travel	Full travel	Current Rating	Resistance
		A	B	C	D	E	F	G					
mm									g	mm	mm	A	mΩ
0.30	TEX020-X-X-5.7	0.20	0.10	0.10	4.00	1.10	0.60	5.70	12.00	0.60	1.10	0.5	100
	TEX021-X-X-5.7	0.21	0.10	0.10	4.00	1.10	0.60	5.70	12.00	0.65	1.10	0.5	100
0.35	TEX025-X-X-5.7	0.25	0.10	0.10	4.00	1.10	0.60	5.70	14.00	0.65	1.10	0.5	100
	TEX026-X-X-5.3	0.26	0.17	0.12	4.00	0.80	0.50	5.30	21.00	0.50	0.80	0.5	120
	TEX026-X-X-5.7	0.26	0.17	0.12	4.00	1.20	0.50	5.70	16.00	0.70	1.10	0.5	120
	TEX026-X-X-5.7	0.26	0.11	0.11	4.00	1.10	0.60	5.70	9.00	0.65	1.10	0.5	200
	TEX026-X-X-6.2	0.26	0.12	0.12	4.00	1.60	0.60	6.20	21.00	0.50	0.75	0.5	100
	TEX026-X-X-6.7	0.26	0.13	0.13	5.00	1.20	0.50	6.70	21.00	0.60	0.95	0.5	180
	0.40	TEX028-X-X-3.6	0.28	0.14	0.14	2.30	1.00	0.30	3.60	17.80	0.50	0.70	1
TEX028-X-X-5.7		0.28	0.13	0.13	4.00	1.10	0.60	5.70	20.00	0.70	1.10	0.5	100
TEX028-X-X-6		0.28	0.13	0.13	4.50	0.90	0.60	6.00	15.00	0.60	1.00	0.5	100
TEX028-X-X-6.2		0.28	0.13	0.13	4.50	1.10	0.60	6.20	15.00	0.60	1.00	0.5	80
TEX028-X-X-6.65		0.28	0.18	0.13	5.00	1.15	0.50	6.65	18.00	0.80	1.00	0.5	150
TEX029-X-X-5.7		0.29	0.15	0.21	4.00	1.00	0.70	5.70	14.00	0.65	1.00	0.5	100
TEX030-X-X-5.7		0.30	0.15	0.15	4.00	1.10	0.60	5.70	10.00	0.65	1.10	0.5	80
TEX030-X-X-6.7		0.30	0.18	0.15	5.00	1.20	0.50	6.70	12.00	0.80	1.00	0.5	100
TEX030-X-X-8.85		0.30	0.15	0.15	6.35	1.50	1.00	8.85	20.00	0.70	2.00	0.5	100
TEX031-X-X-3.3		0.31	0.15	0.15	2.10	0.70	0.50	3.30	20.00	0.45	0.70	0.5	100
TEX031-X-X-5.7		0.31	0.17	0.17	4.10	1.00	0.60	5.70	25.00	0.80	1.00	0.5	100
0.45	TEX035-X-X-4	0.35	0.17	0.17	2.78	0.61	0.61	4.00	26.00	0.39	0.61	0.5	100
	TEX035-X-X-5.7	0.35	0.18	0.18	4.00	1.10	0.60	5.70	23.00	0.65	1.10	0.5	100
	TEX035-X-X-7.7	0.35	0.25	0.16	5.60	1.60	0.50	7.70	18.00	0.50	1.00	0.5	100
	TEX035-X-X-8.65	0.35	0.18	0.18	6.35	1.50	0.80	8.65	22.00	0.80	1.30	0.5	100
	TEX035-X-X-8.85	0.35	0.18	0.18	6.35	1.50	1.00	8.85	22.00	0.80	1.30	0.5	100
	TEX035-X-X-18	0.35	0.26	0.26	10.00	4.70	3.30	18.00	38.00	1.00	1.50	0.5	100
0.5	TEX038-X-X-3.3	0.38	0.21	0.21	2.30	0.50	0.50	3.30	25.00	0.50	0.70	0.5	100
	TEX038-X-X-5.7	0.38	0.20	0.20	4.00	1.10	0.60	5.70	30.00	0.65	1.10	0.5	100
	TEX038-X-X-5.7	0.38	0.20	0.20	3.40	1.65	0.65	5.70	25.00	0.80	1.10	0.5	70
	TEX038-X-X-6	0.38	0.18	0.18	5.00	0.50	0.50	6.00	25.00	0.60	1.00	0.5	100
	TEX038-X-X-8.85	0.38	0.20	0.20	6.35	1.50	1.00	8.85	23.00	0.70	2.00	0.5	100
	TEX038-X-X-11.5	0.38	0.20	0.20	9.00	1.50	1.00	11.50	30.00	1.00	2.50	0.5	100
0.6	TEX045-X-X-5.8	0.45	0.25	0.25	4.00	1.10	0.70	5.80	23.00	0.65	1.10	1	100
	TEX048-X-X-3.95	0.48	0.26	0.26	2.80	0.65	0.50	3.95	23.00	0.60	1.00	1	100
0.65	TEX051-X-X-5.7	0.51	0.26	0.26	3.70	1.00	1.00	5.70	15.00	0.95	1.30	1	100
	TEX051-X-X-5.7	0.51	0.28	0.28	4.00	1.10	0.60	5.70	22.00	0.65	1.10	1	100

Semiconductor Probe

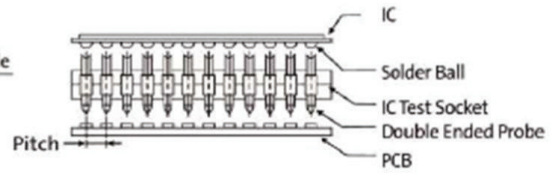

Available Tip Styles



Pitch mm	Part Number	Dimension(mm)							Spring Force g	working travel mm	Full travel mm	Current Rating A	Resistance mΩ
		A	B	C	D	E	F	G					
0.70	TEX055-X-X-5.7	0.55	0.30	0.30	4.00	1.10	0.60	5.70	25.00	0.65	0.80	1	100
	TEX057-X-X-3	0.57	0.35	0.35	2.00	0.65	0.35	3.00	45.00	0.50	0.63	1	100
	TEX057-X-X-3.1	0.57	0.35	0.35	2.00	0.60	0.50	3.10	25.00	0.50	0.60	1	100
	TEX058-X-X-4.9	0.58	0.31	0.31	3.20	1.10	0.60	4.90	30.00	0.65	0.80	1	100
	TEX058-X-X-5.7	0.58	0.30	0.30	4.00	1.10	0.60	5.70	25.00	0.65	1.10	1	100
	TEX058-X-X-6.92	0.58	0.30	0.30	5.30	0.81	0.81	6.92	56.00	0.73	1.00	1	70
	TEX058-X-X-8.65	0.58	0.37	0.30	6.35	1.50	0.80	8.65	35.00	0.80	1.20	1	70
	TEX058-X-X-8.85	0.58	0.37	0.30	6.35	1.50	1.00	8.85	35.00	0.80	1.20	1	70
0.75	TEX058-X-X-10.8	0.58	0.30	0.30	7.30	1.75	1.75	10.80	51.00	1.30	2.00	1	70
0.80	TEX061-X-X-11.85	0.61	0.35	0.35	8.25	1.80	1.80	11.85	30.00	2.40	3.30	1	100
0.80	TEX068-X-X-15.95	0.68	0.50	0.50	13.20	2.00	0.75	15.95	40.00	2.10	3.00	3	80
0.90	TEX075-X-X-6.3	0.75	0.51	0.51	4.00	1.50	0.80	6.30	34.00	1.00	1.50	3	60
1.00	TEX078-X-X-5.7	0.78	0.46	0.46	4.00	1.10	0.60	5.70	30.00	0.80	1.50	1	100
	TEX078-X-X-8.85	0.78	0.55	0.46	6.35	1.50	1.00	8.85	30.00	0.80	1.80	1	100
	TEX081-X-X-3.3	0.81	0.62	0.62	2.05	0.80	0.45	3.30	29.00	0.70	0.80	3	50
	TEX085-X-X-5.7	0.85	0.50	0.50	4.00	1.10	0.60	5.70	22.00	0.65	1.10	1	100
	TEX085-X-X-5.8	0.85	0.50	0.50	4.00	1.15	0.65	5.80	22.00	0.70	1.10	3	80
1.20	TEX100-X-X-13.1	1.00	0.64	0.64	10.00	1.90	1.20	13.10	70.00	2.00	3.10	1	100
	TEX101-X-X-13	1.01	0.67	0.67	10.00	1.60	1.20	13.00	20.00	0.80	1.10	3	50
1.40	TEX130-X-X-16	1.30	0.90	0.90	10.70	3.50	1.80	16.00	20.00	2.60	4.50	3	70
	TEX136-X-X-15.7	1.36	0.80	0.80	11.20	3.90	0.60	15.70	100.00	2.00	4.50	2	100

Other Series



Material

Item	Material
a	Steel or Becu, gold plated
b	PhBr, gold plated
c	Stainless Steel, Music Wire, gold plated

Ordering Example

